


Eterea *portable*




Details




S ↓
**5 hour lifetime,
battery charge 4,5
hours**
autonomia 5 ore,
ricarica 4,5 ore

M | L | XL ↓
**8 hour lifetime,
battery charge 4
hours**
autonomia 8 ore,
ricarica 4 ore

Light data and product code

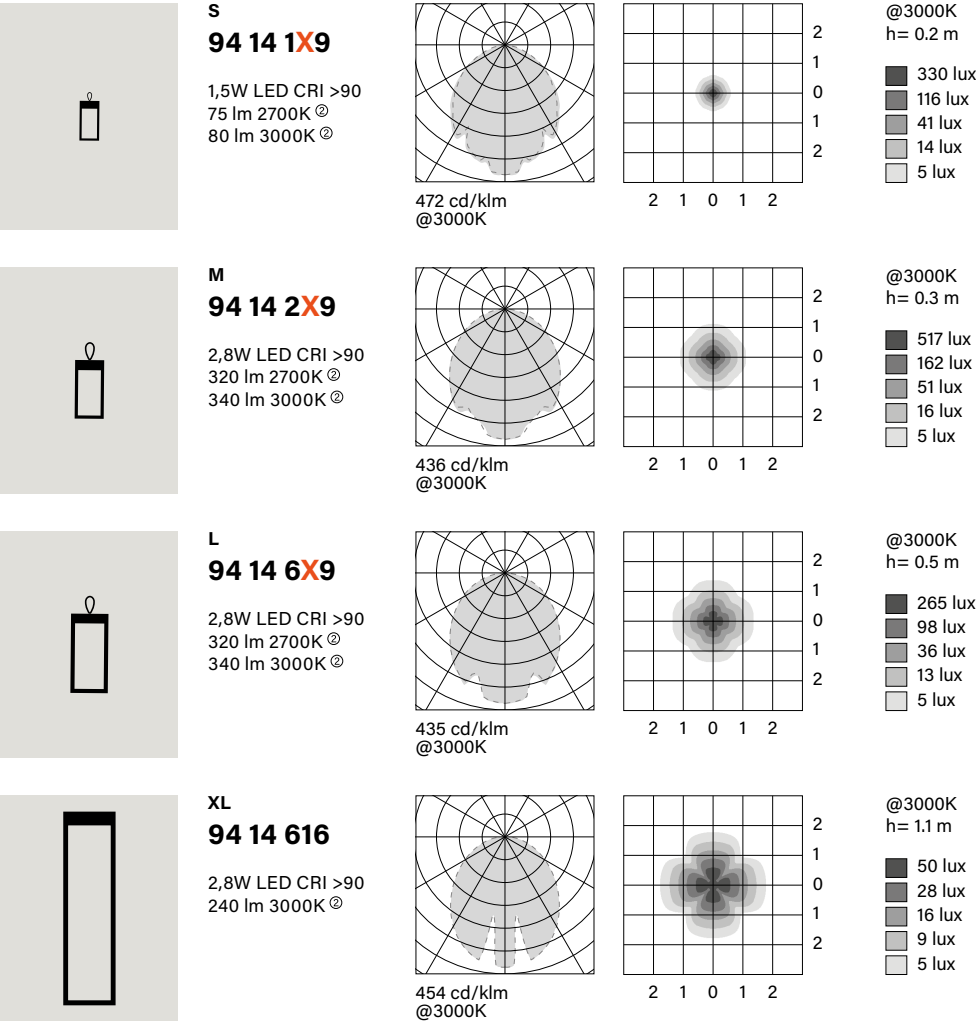

Sizes

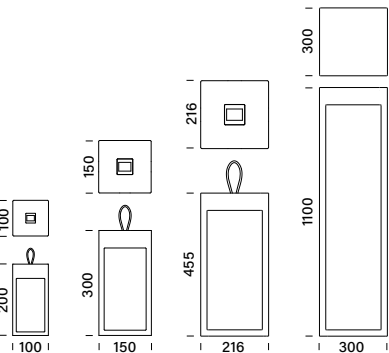

Technical data

X = 9 → 2700K
X = 1 → 3000K

Battery

S → IP65 | IK07
M → IP54 | IK07
L → IP54 | IK07
XL → IP54 | IK08

cable USB 1,5 mts included

S → Type A micro USB connector
Connettore USB tipo Micro-A


M | L | XL → Type C micro USB connector
Connettore USB tipo Micro-C

Battery charger to be orderd separately
Carica batteria da ordinare separatamente

Technical notes

② System lumen


Accessories

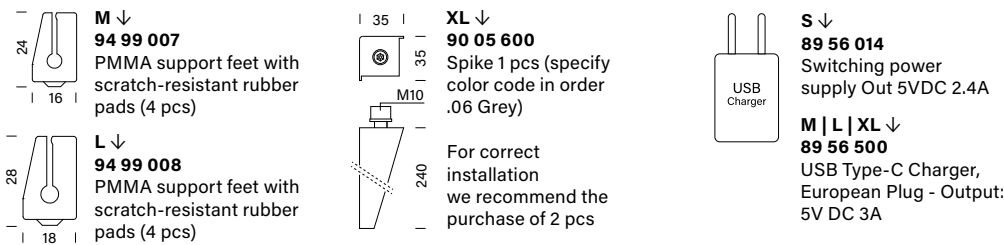



Eterea floor



Light data and product code





M
94 14 3X9
9,6W COB LED CRI >80
420 lm 2700K ②
450 lm 3000K ②




@3000K
h= 0.3 m
579 lux
177 lux
54 lux
16 lux
5 lux





L
94 14 8X9
17,5W LED CRI >90
650 lm 2700K ②
690 lm 3000K ②



@3000K
h= 0.5 m
420 lux
139 lux
46 lux
15 lux
5 lux




XL
94 14 8X6
17,5W LED CRI >90
575 lm 2700K ②
612 lm 3000K ②



@3000K
h= 1.1 m
96 lux
46 lux
22 lux
10 lux
5 lux

Sizes

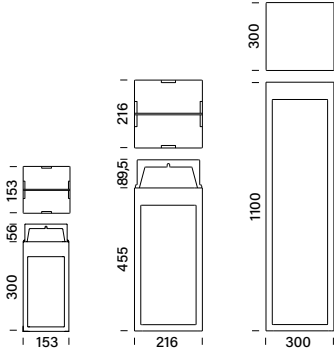

Technical data

X = 9 → 2700K
X = 1 → 3000K

Ⓜ 220-240V 50/60Hz - dimmable TRIAC

IP65 | IK08


cable: 5 mts (3 x 1mm²)

Connector to be ordered separately
Connettore da ordinare separatamente


Technical notes

② System lumen

Accessories



XL ↓
90 05 600
Spike 1 pcs
(specify color
code in order
.06 Grey)
For correct
installation
we recommend
the purchase of
2 pcs



M | L ↓
89 51 085
Ground fixing
kit 2 pcs
(specify color
code in order)



89 17 004
IN/OUT
connector
for 3x4 mm² cable







Control systems

DALI converter available at page 342
Converter DALI disponibili a pag 342


Eterea wall bracket



Light data and product code

	S 94 14 1X6 4W COB LED CRI >80 185 lm 2700K ② 200 lm 3000K ②	 490 cd/klm @3000K		@3000K 1881 lux 427 lux 97 lux 22 lux 5 lux
	M 94 14 4X9 9,6W COB LED CRI >80 370 lm 2700K ② 390 lm 3000K ②	 400 cd/klm @3000K		@3000K 3505 lux 681 lux 132 lux 26 lux 5 lux
	L 94 14 9X9 17,5W LED CRI >90 570 lm 2700K ② 600 lm 3000K ②	 418 cd/klm @3000K		@3000K 133 lux 59 lux 26 lux 11 lux 5 lux

Sizes

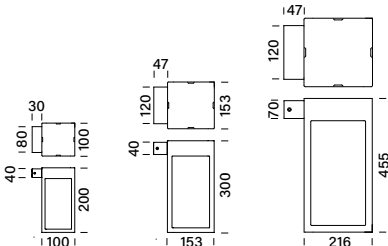

Technical data

X = 9 → 2700K
X = 1 → 3000K

⊕ 220-240V 50/60Hz - dimmable TRIAC


S → IP65 | IK07
M | L → IP65 | IK08

IP68 connector included (through-wiring)
Connettore IP68 incluso (no entra-esci)

Technical notes

② System lumen

Accessories

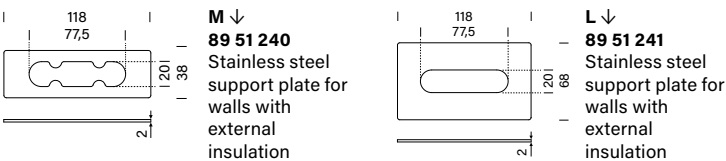

Control systems

DALI converter available at page 342
Converter DALI disponibili a pag 342


Eterea Slim *wall bracket*




Light data and product code



M ON/OFF
94 18 3X9
10,5W LED CRI >80
560 lm 2700K ☉
590 lm 3000K ☉




483 cd/klm
@3000K




@3000K
275 lux
101 lux
37 lux
14 lux
5 lux



L ON/OFF
94 18 5X9
14,5W LED CRI >80
660 lm 2700K ☉
700 lm 3000K ☉




492 cd/klm
@3000K




@3000K
102 lux
48 lux
23 lux
11 lux
5 lux



L DALI
94 18 6X9
14,5W LED CRI >80
660 lm 2700K ☉
700 lm 3000K ☉




492 cd/klm
@3000K



@3000K
102 lux
48 lux
23 lux
11 lux
5 lux

Sizes

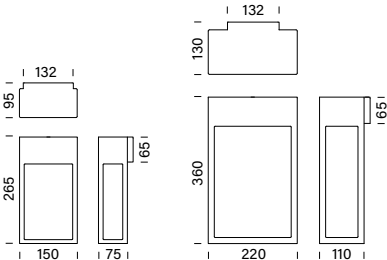

Technical data

X = 9 → 2700K
X = 1 → 3000K

⊕ 220-240V 50/60Hz

IP65 | IK07

IP68 connector included (through-wiring)
Connettore IP68 incluso (no entra-esci)

Technical notes

☉ System lumen