


Rubén Saldaña



		P	CCT	I	Flux	LOR
BLACK FOSTER MICRO Recessed 10	A414-50- 00 -0- N W	14W	2700K	500mA	1550 lm	87%
	A414-50- 00 -1- N W	14W	3000K	500mA	1600 lm	87%
	A414-50- 00 -3- N W	14W	3500K	500mA	1650 lm	87%
	A414-50- 00 -2- N W	14W	4000K	500mA	1700 lm	87%

220
240

V~



IP20

|

CRI>90

|

L90B10
> 60,000 h



MacAdam
Step 3



OPTIONS*



INCL



24 X 187





UGR <19



37°

OPTIONS*	
1	No DIM
2	DIM DALI
3	DIM PUSH
5	DIM Phase Cut**

** NOT AVAILABLE FOR BLACK FOSTER MICRO RECESSED 3 | OTHER DIM OPTIONS PLEASE CONSULT



Extended Family / [Black Foster Surface_117](#) / [Black Foster Suspension_189](#) / [Black Foster Micro 24V_226](#) / [Black Foster 48V_259](#) / [Black Foster Custom System_300](#)



			P	CCT	I	Flux	LOR
BLACK FOSTER MICRO Recessed 3x3	A414-40-  -0- N W		12,6W	2700K	500mA	1395 lm	87%
	A414-40-  -1- N W		12,6W	3000K	500mA	1440 lm	87%
	A414-40-  -3- N W		12,6W	3500K	500mA	1485 lm	87%
	A414-40-  -2- N W		12,6W	4000K	500mA	1530 lm	87%

220 V~ |  IP20 | CRI>90 | L90B10 > 60.000 h


MacAdam
Step 3




OPTIONS*



INCL


60 X 60


UGR <19


37°

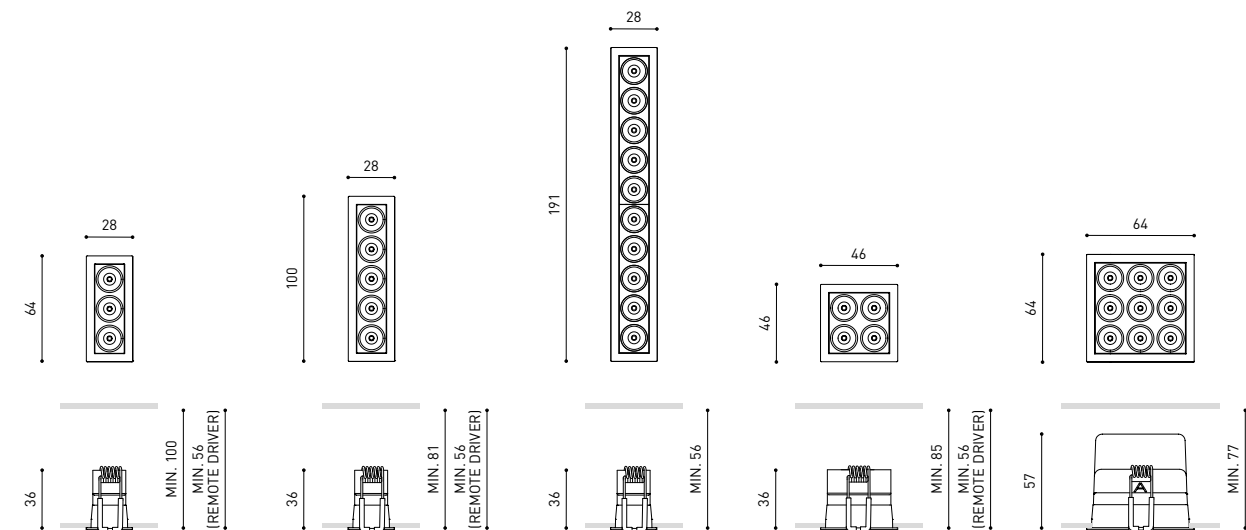



		P	CCT	Beam	I	Flux	LOR
BLACK FOSTER Recessed 1	A319-10- ☉ -0- N WN NMG	2,1W	2700K	38°	700mA	190 lm	92%
	A319-10- ☉ -1- N WN NMG	2,1W	3000K	38°	700mA	210 lm	92%
	A319-10- ☉ -3- N WN NMG	2,1W	3500K	38°	700mA	230 lm	92%
	A319-10- ☉ -2- N WN NMG	2,1W	4000K	38°	700mA	250 lm	92%
	A319-11- ☉ -0- N WN NMG	2,1W	2700K	19°	700mA	190 lm	90%
	A319-11- ☉ -1- N WN NMG	2,1W	3000K	19°	700mA	210 lm	90%
	A319-11- ☉ -3- N WN NMG	2,1W	3500K	19°	700mA	230 lm	90%
	A319-11- ☉ -2- N WN NMG	2,1W	4000K	19°	700mA	250 lm	90%
BLACK FOSTER Recessed 1 IP54	A546-10- ☉ -0- N WN NMG W	2,1W	2700K	38°	700mA	190 lm	86%
	A546-10- ☉ -1- N WN NMG W	2,1W	3000K	38°	700mA	210 lm	86%
	A546-10- ☉ -3- N WN NMG W	2,1W	3500K	38°	700mA	230 lm	86%
	A546-10- ☉ -2- N WN NMG W	2,1W	4000K	38°	700mA	250 lm	86%

220
240

V~

IP20

|

IP54

|

CRI>90

|

L90B10
> 102.000 h

MacAdam
Step 3

OPTIONS*

INCL

50 X 50

UGR <19

38° / 19°



		P	CCT	Beam	I	Flux	LOR
BLACK FOSTER Recessed 2	A319-20- ☉ -0- N WN NMG	4,2W	2700K	38°	700mA	380 lm	92%
	A319-20- ☉ -1- N WN NMG	4,2W	3000K	38°	700mA	420 lm	92%
	A319-20- ☉ -3- N WN NMG	4,2W	3500K	38°	700mA	460 lm	92%
	A319-20- ☉ -2- N WN NMG	4,2W	4000K	38°	700mA	500 lm	92%
	A319-21- ☉ -0- N WN NMG	4,2W	2700K	19°	700mA	380 lm	90%
	A319-21- ☉ -1- N WN NMG	4,2W	3000K	19°	700mA	420 lm	90%
	A319-21- ☉ -3- N WN NMG	4,2W	3500K	19°	700mA	460 lm	90%
	A319-21- ☉ -2- N WN NMG	4,2W	4000K	19°	700mA	500 lm	90%
BLACK FOSTER Recessed 2 IP54	A546-20- ☉ -0- N WN NMG W	4,2W	2700K	38°	700mA	380 lm	86%
	A546-20- ☉ -1- N WN NMG W	4,2W	3000K	38°	700mA	420 lm	86%
	A546-20- ☉ -3- N WN NMG W	4,2W	3500K	38°	700mA	460 lm	86%
	A546-20- ☉ -2- N WN NMG W	4,2W	4000K	38°	700mA	500 lm	86%

220
240

V~

IP20

|

IP54

|

CRI>90

|

L90B10
> 102.000 h

MacAdam
Step 3

OPTIONS*

INCL

50 X 93

UGR <19

38° / 19°



		P	CCT	Beam	I	Flux	LOR
BLACK FOSTER Recessed 3	A319-30- ☉ -0- N WN NMG	6,3W	2700K	38°	700mA	570 lm	92%
	A319-30- ☉ -1- N WN NMG	6,3W	3000K	38°	700mA	630 lm	92%
	A319-30- ☉ -3- N WN NMG	6,3W	3500K	38°	700mA	690 lm	92%
	A319-30- ☉ -2- N WN NMG	6,3W	4000K	38°	700mA	750 lm	92%
	A319-31- ☉ -0- N WN NMG	6,3W	2700K	19°	700mA	570 lm	90%
	A319-31- ☉ -1- N WN NMG	6,3W	3000K	19°	700mA	630 lm	90%
	A319-31- ☉ -3- N WN NMG	6,3W	3500K	19°	700mA	690 lm	90%
	A319-31- ☉ -2- N WN NMG	6,3W	4000K	19°	700mA	750 lm	90%
	A546-30- ☉ -0- N WN NMG W	6,3W	2700K	38°	700mA	570 lm	86%
	A546-30- ☉ -1- N WN NMG W	6,3W	3000K	38°	700mA	630 lm	86%
BLACK FOSTER Recessed 3 IP54	A546-30- ☉ -3- N WN NMG W	6,3W	3500K	38°	700mA	690 lm	86%
	A546-30- ☉ -2- N WN NMG W	6,3W	4000K	38°	700mA	750 lm	86%

220
240

V~

IP20

|

IP54

|

CRI>90

|

L90B10
> 102.000 h

MacAdam
Step 3


OPTIONS*

INCL

50 X 136


UGR <19

38° / 19°

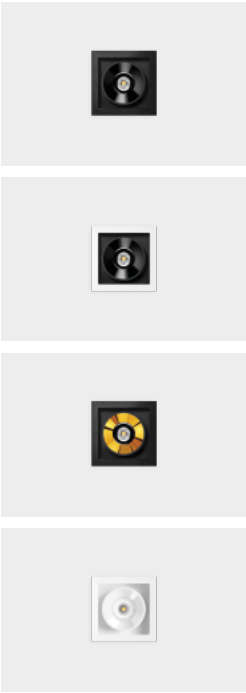

☉	*OPTIONS	FINISHING	Body	Lampshade
1	No DIM	N	N ■	N ■
2	DIM Push	WN	W □	N ■
4	DIM DALI	NMG	N ■	MG ■
5	DIM Phase Cut**	W	W □	W □

** NOT AVAILABLE FOR BLACK FOSTER RECESSED 1 | OTHER DIM OPTIONS PLEASE CONSULT

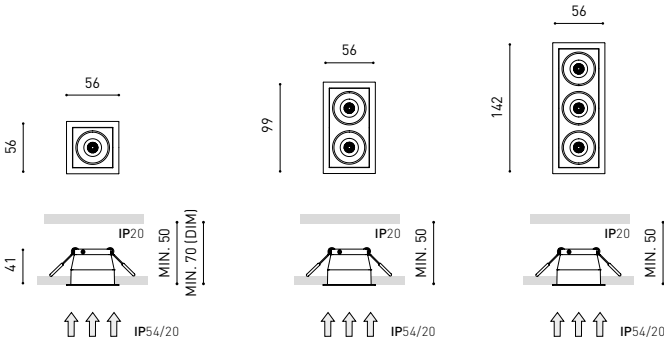



		P	CCT	Beam	I	Flux	LOR
BLACK FOSTER Recessed 5	A319-40- ☉ -0- N WN NMG	10,5W	2700K	38°	700mA	950 lm	92%
	A319-40- ☉ -1- N WN NMG	10,5W	3000K	38°	700mA	1050 lm	92%
	A319-40- ☉ -3- N WN NMG	10,5W	3500K	38°	700mA	1150 lm	92%
	A319-40- ☉ -2- N WN NMG	10,5W	4000K	38°	700mA	1250 lm	92%
	A319-41- ☉ -0- N WN NMG	10,5W	2700K	19°	700mA	950 lm	90%
	A319-41- ☉ -1- N WN NMG	10,5W	3000K	19°	700mA	1050 lm	90%
	A319-41- ☉ -3- N WN NMG	10,5W	3500K	19°	700mA	1150 lm	90%
	A319-41- ☉ -2- N WN NMG	10,5W	4000K	19°	700mA	1250 lm	90%
BLACK FOSTER Recessed 5 IP54	A546-40- ☉ -0- N WN NMG W	10,5W	2700K	38°	700mA	950 lm	86%
	A546-40- ☉ -1- N WN NMG W	10,5W	3000K	38°	700mA	1050 lm	86%
	A546-40- ☉ -3- N WN NMG W	10,5W	3500K	38°	700mA	1150 lm	86%
	A546-40- ☉ -2- N WN NMG W	10,5W	4000K	38°	700mA	1250 lm	86%

220
240 V~ | IP20 | IP54 | CRI>90 | L90B10
> 102.000 h

MacAdam
Step 3


OPTIONS*

INCL

50 X 222

UGR <19

38° / 19°



		P	CCT	Beam	I	Flux	LOR
BLACK FOSTER Recessed 2x2	A319-50- ☉ -0- N WN	8,4W	2700K	38°	700mA	760 lm	92%
	A319-50- ☉ -1- N WN	8,4W	3000K	38°	700mA	840 lm	92%
	A319-50- ☉ -3- N WN	8,4W	3500K	38°	700mA	920 lm	92%
	A319-50- ☉ -2- N WN	8,4W	4000K	38°	700mA	1000 lm	92%
	A319-51- ☉ -0- N WN	8,4W	2700K	19°	700mA	760 lm	90%
	A319-51- ☉ -1- N WN	8,4W	3000K	19°	700mA	840 lm	90%
	A319-51- ☉ -3- N WN	8,4W	3500K	19°	700mA	920 lm	90%
	A319-51- ☉ -2- N WN	8,4W	4000K	19°	700mA	1000 lm	90%
BLACK FOSTER Recessed 2x2 IP54	A546-50- ☉ -0- N WN W	8,4W	2700K	38°	700mA	760 lm	86%
	A546-50- ☉ -1- N WN W	8,4W	3000K	38°	700mA	840 lm	86%
	A546-50- ☉ -3- N WN W	8,4W	3500K	38°	700mA	920 lm	86%
	A546-50- ☉ -2- N WN W	8,4W	4000K	38°	700mA	1000 lm	86%

220
240 V~ | IP20 | IP54 | CRI>90 | L90B10
> 102.000 h

MacAdam
Step 3

OPTIONS*

INCL

93 X 93

UGR <19

38° / 19°



COLOUR | N | W | WN | NMG | MATERIAL | AL | ABS+PC | RAL » 392

COLOURS MAY AFFECT THE LIGHTING PARAMETERS

“THE INVISIBLE BLACK” IS ONLY AVAILABLE FOR N, WN & NMG COLOURS

& » 370



		P	CCT	Beam	I	Flux	LOR
BLACK FOSTER Recessed 10	A319-60- ☉ -0- NT WT NTMG WTW	21W	2700K	38°	700mA	1900 lm	92%
	A319-60- ☉ -1- NT WT NTMG WTW	21W	3000K	38°	700mA	2100 lm	92%
	A319-60- ☉ -3- NT WT NTMG WTW	21W	3500K	38°	700mA	2300 lm	92%
	A319-60- ☉ -2- NT WT NTMG WTW	21W	4000K	38°	700mA	2500 lm	92%
	A319-61- ☉ -0- NT WT NTMG	21W	2700K	19°	700mA	1900 lm	90%
	A319-61- ☉ -1- NT WT NTMG	21W	3000K	19°	700mA	2100 lm	90%
	A319-61- ☉ -3- NT WT NTMG	21W	3500K	19°	700mA	2300 lm	90%
	A319-61- ☉ -2- NT WT NTMG	21W	4000K	19°	700mA	2500 lm	90%

220
240 V~ | IP20 | CRI>90 | L90B10
> 102.000 h

MacAdam
Step 3

OPTIONS*

INCL


50 X 440

UGR <19

38° / 19°

☉	*OPTIONS
1	No DIM
2	DIM Push
4	DIM DALI
5	DIM Phase Cut

FINISHING	Body	Lampshade
N	N	N
WN	W	N
NMG	N	MG
W	W	W
NT	NT	N
WT	WT	N
NTMG	NT	MG
WTW	WT	W

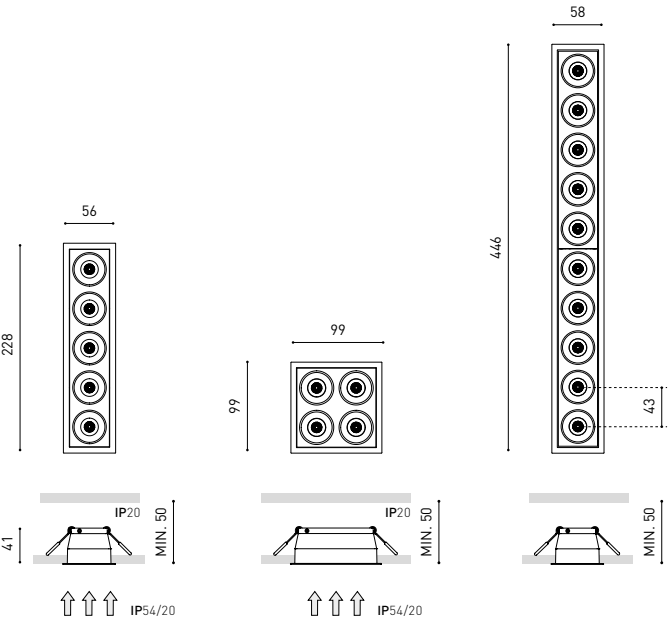

COLOUR | NT | WT | NTMG | WTW | MATERIAL | AL | ABS+PC | RAL » 392

COLOURS MAY AFFECT THE LIGHTING PARAMETERS

“THE INVISIBLE BLACK” IS ONLY AVAILABLE FOR N, WN & NMG COLOURS

& » 370





				P	CCT	I	Flux	LOR	
BLACK FOSTER Asymmetric Recessed 2	A374-20-	0-	N WN	4,2W	2700K	700mA	380 lm	90%	
	A374-20-	1-	N WN	4,2W	3000K	700mA	420 lm	90%	
	A374-20-	3-	N WN	4,2W	3500K	700mA	460 lm	90%	
	A374-20-	2-	N WN	4,2W	4000K	700mA	500 lm	90%	
220 240 V~		IP20	CRI>90	L90B10 > 102.000h	 MacAdam Step 3	 OPTIONS*	 INCL	 50 X 93	 38°



					P	CCT	I	Flux	LOR
BLACK FOSTER Asymmetric Recessed 3	A374-30-	0-	N WN	6,3W	2700K	700mA	570 lm	90%	
	A374-30-	1-	N WN	6,3W	3000K	700mA	630 lm	90%	
	A374-30-	3-	N WN	6,3W	3500K	700mA	690 lm	90%	
	A374-30-	2-	N WN	6,3W	4000K	700mA	750 lm	90%	
220 240 V~		IP20	CRI>90	L90B10 > 102.000 h	 MacAdam Step 3	 OPTIONS*	 INCL	 50 X 136	 38°




			P	CCT	I	Flux	LOR		
BLACK FOSTER Asymmetric Recessed 5	A374-40-	0-	N WN	10,5W	2700K	700mA	950 lm	90%	
	A374-40-	1-	N WN	10,5W	3000K	700mA	1050 lm	90%	
	A374-40-	3-	N WN	10,5W	3500K	700mA	1150 lm	90%	
	A374-40-	2-	N WN	10,5W	4000K	700mA	1250 lm	90%	
220 240 V~		IP20	CRI>90	L90B10 → 102.000h	 MacAdam Step 3	 OPTIONS*	 INCL	 50 X 222	 38°

Ⓢ	*OPTIONS
1	No DIM
2	DIM Push
4	DIM DALI
5	DIM Phase Cut

OTHER DIM OPTIONS PLEASE CONSULT

FINISHING	Body	Lampshade
N	N ■	N ■
WN	W □	N ■

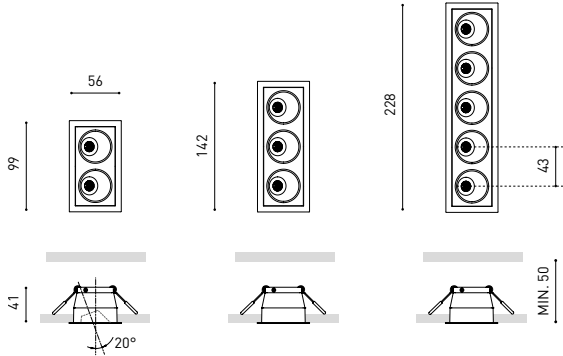

COLOUR	N ■ WN □ ■	MATERIAL	AL ABS+PC	RAL	» 392
» 370					




								P	CCT	Beam	I	Flux	LOR						
BLACK FOSTER Tilt 5	A479-40-	00	-0-	NT	WT	NTMG	WTW	10,5W	2700K	38°	700mA	950 lm	92%						
	A479-40-	00	-1-	NT	WT	NTMG	WTW	10,5W	3000K	38°	700mA	1050 lm	92%						
	A479-40-	00	-3-	NT	WT	NTMG	WTW	10,5W	3500K	38°	700mA	1150 lm	92%						
	A479-40-	00	-2-	NT	WT	NTMG	WTW	10,5W	4000K	38°	700mA	1250 lm	92%						
	A479-41-	00	-0-	NT	WT	NTMG		10,5W	2700K	19°	700mA	950 lm	90%						
	A479-41-	00	-1-	NT	WT	NTMG		10,5W	3000K	19°	700mA	1050 lm	90%						
	A479-41-	00	-3-	NT	WT	NTMG		10,5W	3500K	19°	700mA	1150 lm	90%						
	A479-41-	00	-2-	NT	WT	NTMG		10,5W	4000K	19°	700mA	1250 lm	90%						
220 240 V~		IP20	CRI>90	L90B10 > 102.000 h					MacAdam Step 3		OPTIONS*		INCL		70 X 235		30°		38° / 19°

Ⓢ	*OPTIONS
1	No DIM
2	DIM DALI
3	DIM Push
5	DIM Phase Cut

OTHER DIM OPTIONS PLEASE CONSULT

FINISHING	Body	Tilt Profile	Lampshade
NT	NT ■	NT ■	N ■
WT	WT □	WT □	N ■
NTMG	NT ■	NT ■	MG ■
WTW	WT □	WT □	W □

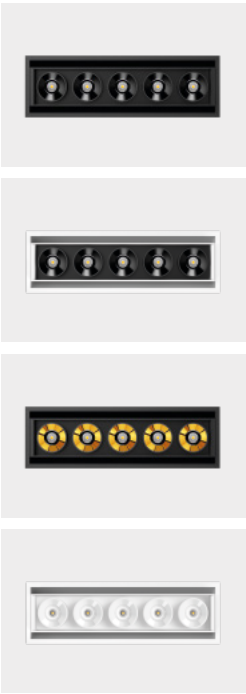

COLOUR	NT ■ WT □ NTMG ■ WTW □ □	MATERIAL	AL ABS+PC	RAL	» 392
» 370					

COLOURS MAY AFFECT THE LIGHTING PARAMETERS
"THE INVISIBLE BLACK" IS ONLY AVAILABLE FOR N, WT & NTMG COLOURS


Black Foster




		P	CCT	Beam	I	Flux	LOR
BLACK FOSTER Trimless 2	A558-20- ☉ -0- N W NMG	4,2W	2700K	38°	700mA	380 lm	92%
	A558-20- ☉ -1- N W NMG	4,2W	3000K	38°	700mA	420 lm	92%
	A558-20- ☉ -3- N W NMG	4,2W	3500K	38°	700mA	460 lm	92%
	A558-20- ☉ -2- N W NMG	4,2W	4000K	38°	700mA	500 lm	92%
	A558-21- ☉ -0- N NMG	4,2W	2700K	19°	700mA	380 lm	90%
	A558-21- ☉ -1- N NMG	4,2W	3000K	19°	700mA	420 lm	90%
	A558-21- ☉ -3- N NMG	4,2W	3500K	19°	700mA	460 lm	90%
	A558-21- ☉ -2- N NMG	4,2W	4000K	19°	700mA	500 lm	90%
BLACK FOSTER Trimless 3	A558-30- ☉ -0- N W NMG	6,3W	2700K	38°	700mA	570 lm	92%
	A558-30- ☉ -1- N W NMG	6,3W	3000K	38°	700mA	630 lm	92%
	A558-30- ☉ -3- N W NMG	6,3W	3500K	38°	700mA	690 lm	92%
	A558-30- ☉ -2- N W NMG	6,3W	4000K	38°	700mA	750 lm	92%
	A558-31- ☉ -0- N NMG	6,3W	2700K	19°	700mA	570 lm	90%
	A558-31- ☉ -1- N NMG	6,3W	3000K	19°	700mA	630 lm	90%
	A558-31- ☉ -3- N NMG	6,3W	3500K	19°	700mA	690 lm	90%
	A558-31- ☉ -2- N NMG	6,3W	4000K	19°	700mA	750 lm	90%
BLACK FOSTER Trimless 5	A558-40- ☉ -0- N W NMG	10,5W	2700K	38°	700mA	950 lm	92%
	A558-40- ☉ -1- N W NMG	10,5W	3000K	38°	700mA	1050 lm	92%
	A558-40- ☉ -3- N W NMG	10,5W	3500K	38°	700mA	1150 lm	92%
	A558-40- ☉ -2- N W NMG	10,5W	4000K	38°	700mA	1250 lm	92%
	A558-41- ☉ -0- N NMG	10,5W	2700K	19°	700mA	950 lm	90%
	A558-41- ☉ -1- N NMG	10,5W	3000K	19°	700mA	1050 lm	90%
	A558-41- ☉ -3- N NMG	10,5W	3500K	19°	700mA	1150 lm	90%
	A558-41- ☉ -2- N NMG	10,5W	4000K	19°	700mA	1250 lm	90%
BLACK FOSTER Trimless 10	A558-50- ☉ -0- N W NMG	21W	2700K	38°	700mA	1900 lm	92%
	A558-50- ☉ -1- N W NMG	21W	3000K	38°	700mA	2100 lm	92%
	A558-50- ☉ -3- N W NMG	21W	3500K	38°	700mA	2300 lm	92%
	A558-50- ☉ -2- N W NMG	21W	4000K	38°	700mA	2500 lm	92%
	A558-51- ☉ -0- N NMG	21W	2700K	19°	700mA	1900 lm	90%
	A558-51- ☉ -1- N NMG	21W	3000K	19°	700mA	2100 lm	90%
	A558-51- ☉ -3- N NMG	21W	3500K	19°	700mA	2300 lm	90%
	A558-51- ☉ -2- N NMG	21W	4000K	19°	700mA	2500 lm	90%
BLACK FOSTER Trimless 15	A558-60- ☉ -0- N W NMG	31,5W	2700K	38°	700mA	2850 lm	92%
	A558-60- ☉ -1- N W NMG	31,5W	3000K	38°	700mA	3150 lm	92%
	A558-60- ☉ -3- N W NMG	31,5W	3500K	38°	700mA	3450 lm	92%
	A558-60- ☉ -2- N W NMG	31,5W	4000K	38°	700mA	3750 lm	92%
	A558-61- ☉ -0- N NMG	31,5W	2700K	19°	700mA	2850 lm	90%
	A558-61- ☉ -1- N NMG	31,5W	3000K	19°	700mA	3150 lm	90%
	A558-61- ☉ -3- N NMG	31,5W	3500K	19°	700mA	3450 lm	90%
	A558-61- ☉ -2- N NMG	31,5W	4000K	19°	700mA	3750 lm	90%
220 V~ IP20 CRI>90 L90B10 >102.000h		EXCL**	MacAdam Step 3	OPTIONS*	INCL	UGR <19	38° / 19°

☉	*OPTIONS
1	No DIM
2	DIM Push
4	DIM DALI
5	DIM Phase Cut***

*** NOT AVAILABLE FOR BLACK FOSTER TRIMLESS 15 | OTHER DIM OPTIONS PLEASE CONSULT

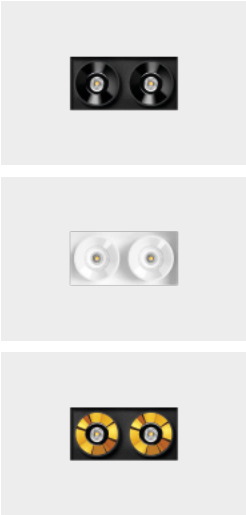


FINISHING	Body	Lampshade
N	N	N
W	W	W
NMG	N	MG

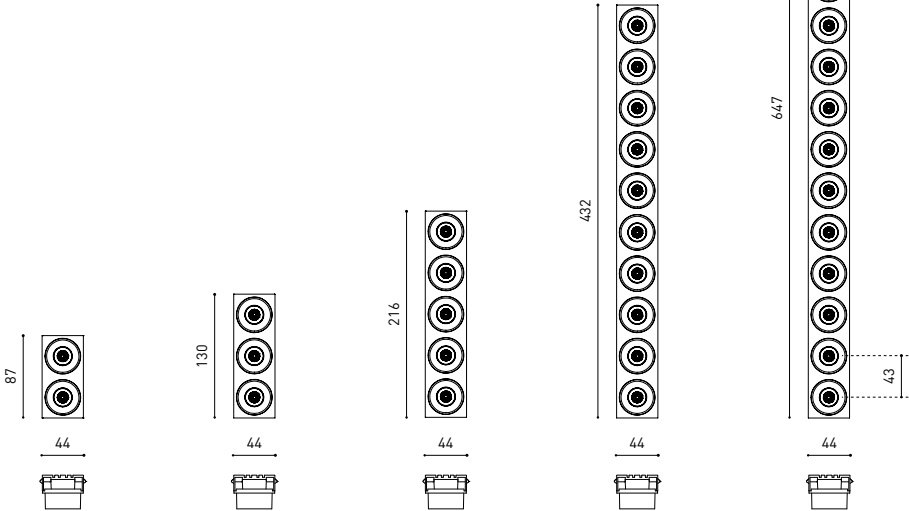

EASY INSTALLATION

ACCESSIBLE DRIVER AFTER INSTALLATION



ACCESSORIES**

BLACK FOSTER Trimless 2 Accessory

A560-00-02- | W | N |

49 X 93

BLACK FOSTER Trimless 3 Accessory

A560-00-03- | W | N |

49 X 136

BLACK FOSTER Trimless 5 Accessory

A560-00-05- | W | N |

49 X 222

BLACK FOSTER Trimless 10 Accessory

A560-00-10- | W | N |


49 X 438

BLACK FOSTER Trimless 15 Accessory

A560-00-15- | W | N |

49 X 653

** MANDATORY FOR INSTALLATION

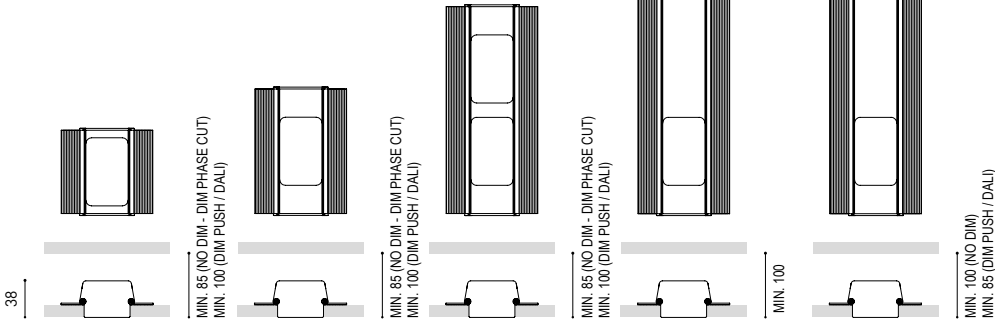

220
240 V~ |  IP20 |  CRI>90 |  L90B10
>102,000 h

 EXCL** |  MacAdam
Step.3 |  OPTIONS* |  INCL |  38°

220
240 V~ |  IP20 |  CRI>90 |  L90B10
>102.000h

 EXCL** |  MacAdam
Step.3 |  OPTIONS* |  INCL |  38°

220
240 V~ |  IP20 |  CRI>90 |  L90B10
>102.000h

 EXCL** |  Macadam
Stone.3 |  OPTIONS* |  INCL |  38°

220
240 V~ |  IP20 |  CRI>90 |  L90B10
> 102.000h

 EXCL** |  Macadam
Stab.3 |  OPTIONS* |  INCL |  38°

220
240 V~ |  IP20 |  CRI>90 |  L90B10
> 102.000h


 EXCL** |  MacAdam |  OPTIONS* |  INCL |  38°

PLASTERBOARD CEILING, MANDATORY THICKNESS 12,5mm. (o) & » 370

*** NOT AVAILABLE FOR BLACK FOSTER
TRIMLESS 15 | OTHER DIM OPTIONS
PLEASE CONSULT



ACCESSIBLE DRIVER AFTER INSTALLATION

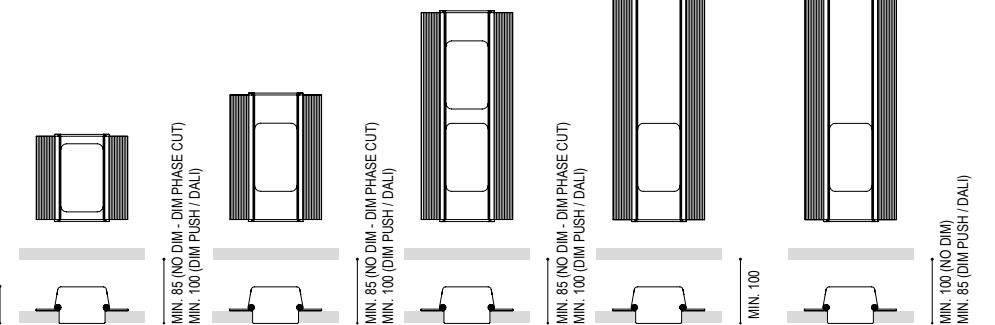

BLACK FOSTER Trimless 2 Accessory

 49 X 93

A560-00-03- | W | N |

49 X 136

A560-00-05- | W | N |

49 X 222

A560-00-10- | W | N |

49 X 438


BLACK FOSTER Trimless 15 Accessory

A560-00-15- | W | N |

49 X 653

** MANDATORY FOR INSTALLATION

PLASTERBOARD CEILING, MANDATORY THICKNESS 12,5mm.




		P	CCT	Beam	I	Flux	LOR
BLACK FOSTER S Recessed 1	A484-1- ☎ -00- N WN	6W	2700K	23°	500mA	580 lm	86%
	A484-1- ☎ -01- N WN	6W	3000K	23°	500mA	610 lm	86%
	A484-1- ☎ -02- N WN	6W	4000K	23°	500mA	650 lm	86%
	A484-1- ☎ -10- N W WN	6W	2700K	39°	500mA	580 lm	87%
	A484-1- ☎ -11- N W WN	6W	3000K	39°	500mA	610 lm	87%
	A484-1- ☎ -12- N W WN	6W	4000K	39°	500mA	650 lm	87%
220 V~ ☐ IP20 CRI>90 L80B10 > 60.000h		MacAdam Step 2 OPTIONS* INCL 70 X 70 UGR <19 23° / 39°					



		P	CCT	Beam	I	Flux	LOR
BLACK FOSTER S Recessed 2	A484-2- ☎ -00- N WN	12W	2700K	23°	500mA	1160 lm	86%
	A484-2- ☎ -01- N WN	12W	3000K	23°	500mA	1220 lm	86%
	A484-2- ☎ -02- N WN	12W	4000K	23°	500mA	1300 lm	86%
	A484-2- ☎ -10- N W WN	12W	2700K	39°	500mA	1160 lm	87%
	A484-2- ☎ -11- N W WN	12W	3000K	39°	500mA	1220 lm	87%
	A484-2- ☎ -12- N W WN	12W	4000K	39°	500mA	1300 lm	87%
220 V~ ☐ IP20 CRI>90 L80B10 > 60.000h		MacAdam Step 2 OPTIONS* INCL 70 X 132 UGR <19 23° / 39°					

☎	*OPTIONS
1	No DIM
2	DIM DALI
3	DIM Push
5	DIM Phase Cut
OTHER DIM OPTIONS PLEASE CONSULT	


FINISHING	Body	Lampshade
N	N ■	N ■
W	W □	W □
WN	W □	N ■

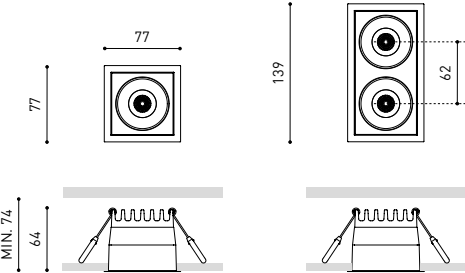

COLOUR | N ■ | W □ | WN ■ | MATERIAL | AL | ABS+PC | RAL ⓘ » 392

COLOURS MAY AFFECT THE LIGHTING PARAMETERS
"THE INVISIBLE BLACK" IS ONLY AVAILABLE FOR N & WN COLOURS

ⓘ & » 370



		P	CCT	Beam	I	Flux	LOR
BLACK FOSTER S Trimless 1	A485-1- ☎ -00- N	6W	2700K	23°	500mA	580 lm	86%
	A485-1- ☎ -01- N	6W	3000K	23°	500mA	610 lm	86%
	A485-1- ☎ -02- N	6W	4000K	23°	500mA	650 lm	86%
	A485-1- ☎ -10- N	6W	2700K	39°	500mA	580 lm	87%
	A485-1- ☎ -11- N	6W	3000K	39°	500mA	610 lm	87%
	A485-1- ☎ -12- N	6W	4000K	39°	500mA	650 lm	87%
220 V~ ☐ IP20 CRI>90 L80B10 > 60.000h		MacAdam Step 2 OPTIONS* INCL-REMOTE 70 X 70 UGR <19 23° / 39°					




		P	CCT	Beam	I	Flux	LOR
BLACK FOSTER S Trimless 2	A485-2- ☎ -00- N	12W	2700K	23°	500mA	1160 lm	86%
	A485-2- ☎ -01- N	12W	3000K	23°	500mA	1220 lm	86%
	A485-2- ☎ -02- N	12W	4000K	23°	500mA	1300 lm	86%
	A485-2- ☎ -10- N	12W	2700K	39°	500mA	1160 lm	87%
	A485-2- ☎ -11- N	12W	3000K	39°	500mA	1220 lm	87%
	A485-2- ☎ -12- N	12W	4000K	39°	500mA	1300 lm	87%
220 V~ ☐ IP20 CRI>90 L80B10 > 60.000h		MacAdam Step 2 OPTIONS* INCL-REMOTE 70 X 132 UGR <19 23° / 39°					



		P	CCT	Beam	I	Flux	LOR
BLACK FOSTER S Trimless 4	A485-4- ☎ -00- N	24W	2700K	23°	500mA	2320 lm	86%
	A485-4- ☎ -01- N	24W	3000K	23°	500mA	2440 lm	86%
	A485-4- ☎ -02- N	24W	4000K	23°	500mA	2600 lm	86%
	A485-4- ☎ -10- N	24W	2700K	39°	500mA	2320 lm	87%
	A485-4- ☎ -11- N	24W	3000K	39°	500mA	2440 lm	87%
	A485-4- ☎ -12- N	24W	4000K	39°	500mA	2600 lm	87%
220 V~ ☐ IP20 CRI>90 L80B10 > 60.000h		MacAdam Step 2 OPTIONS* INCL-REMOTE 70 X 256 UGR <19 23° / 39°					

☎	*OPTIONS
1	No DIM
2	DIM DALI
3	DIM Push
5	DIM Phase Cut**
** NOT AVAILABLE FOR BLACK FOSTER S TRIMLESS 4 OTHER DIM OPTIONS PLEASE CONSULT	

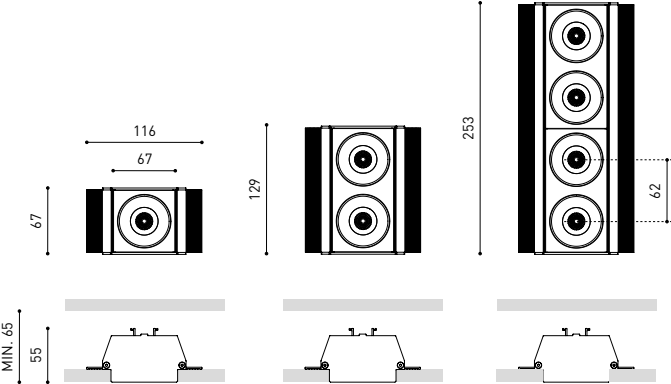

COLOUR | N ■ | MATERIAL | AL | ABS+PC | RAL ⓘ » 392

PLASTERBOARD CEILING, MANDATORY THICKNESS 12,5mm.

ⓘ & » 370