

NANO STAINLESS STEEL


Walk over

NANO / LED White


round



square



recessed boxes

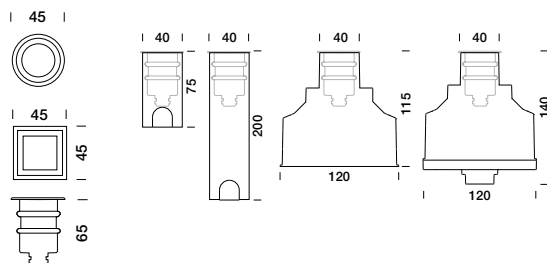

max. 700mA
dimable PWM

cable: 0,5 m (2 x 0,50 mm²)

IP68 Full Dry protection rating
IK07 mechanical resistance

walk over 500 Kg

LED colour temperature congruator

X = 9 → 2700K 250 lm (1)

X = 1 → 3000K 250 lm (1)
4000K on request

↓ note:
connector, power supply and recessed box to
be ordered separately




14°
narrow


2W LED CRI >80
175 lm 2700K (2)
175 lm 3000K (2)

→ 84 00 0X1

→ 84 70 0X1



12722 cd/klm
@3000K



@3000K
d: 0,2 m
149 lux
98 lux
64 lux
38 lux
17 lux



← light simulation

Distance from wall: 0,1 m
Interdistance of fixtures: 2 m
Height of wall: 4 m

code: 84 00 011




21°
medium


2W LED CRI >80
165 lm 2700K (2)
165 lm 3000K (2)

→ 84 00 0X3


→ 84 70 0X3



5597 cd/klm
@3000K



@3000K
d: 0,3 m
64 lux
42 lux
28 lux
16 lux
7 lux

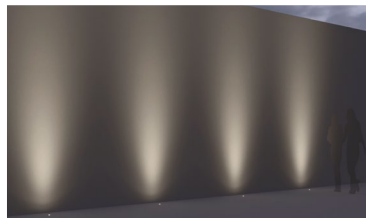

← light simulation

Distance from wall: 0,2 m
Interdistance of fixtures: 2 m
Height of wall: 4 m

code: 84 00 013




33°
wide


2W LED CRI >80
155 lm 2700K (2)
155 lm 3000K (2)

→ 84 00 0X8

→ 84 70 0X8



2578 cd/klm
@3000K



@3000K
d: 0,4 m
40 lux
26 lux
17 lux
10 lux
5 lux



← light simulation

Distance from wall: 0,3 m
Interdistance of fixtures: 2 m
Height of wall: 4 m

code: 84 00 018




45°x13°
elliptical


2W LED CRI >80
160 lm 2700K (2)
160 lm 3000K (2)

→ 84 00 0X7

→ 84 70 0X7



4532 cd/klm
@3000K



@3000K
d: 0,3 m
239 lux
158 lux
103 lux
62 lux
28 lux



← light simulation

Distance from wall: 0,1 m
Interdistance of fixtures: 2 m
Height of wall: 4 m

code: 84 00 017




30°
sandblasted


2W LED CRI >80
160 lm 2700K (2)
160 lm 3000K (2)

→ 84 00 0X5

→ 84 70 0X5



2669 cd/klm
@3000K



@3000K
d: 0,6 m
17 lux
11 lux
7 lux
4 lux
2 lux



← light simulation


Distance from wall: 0,3 m
Interdistance of fixtures: 2 m
Height of wall: 2,5 m

code: 84 00 015

CC power supplies / accessories


IP20		IP67				
ON/OFF	DALI	ON/OFF			DALI	
89 56 215	89 56 118	89 56 225	89 56 090	89 56 117	89 56 178	89 56 180
16W  158x28x33	17W / 32W  143x67x21	14W  110x38x25	14W  110x38x25	30W  152x38x25	30W  155x54x26	30W  155x54x26
350mA	350mA / 700mA	350mA	700mA	700mA	350mA	700mA
1 ÷ 14*	1 ÷ 12*	1 ÷ 12*	1 ÷ 6*	8 ÷ 13*	1 ÷ 13*	1 ÷ 13*

* The values present in the scheme are relative to the maximum number of products that can be connected to the driver.




Recessed box
h. 75 mm

89 45 033




Recessed box
h. 200 mm

89 45 034



Recessed box
h. 115 mm
base Ø 120 mm

89 45 038



Recessed box IP67
h. 140 mm
base Ø 120 mm

89 45 039



IP68 connector for
2x0,75 mm² cable

89 17 006



IP68 Micro Paguro
connector for
2x1,5 mm² cable

89 17 013